



AEROSOL CAN MOUNT P/N 1048-4 INSTALLATION INSTRUCTIONS

For additional assistance call 888-514-0083 between 8AM-5PM EST or email: info@pactoolmounts.com

CAUTION

To avoid the risk of personal injury, property damage or product damage, please use the included fasteners for mounting.

- * The bracket must be securely mounted to a stable surface and material.
- * When mounting bracket to PAC TRAC aluminum products **P/N 7000, P/N 7020, P/N 7040, P/N 7050** with the included Trac Lok inserts **P/N 7016**, torque the screws to a maximum 15 in-lbs.
- * PAC recommends regular and frequent inspections to be certain of proper operation and installation.



FOR USE WITH CANS 2-5/8" DIAMETER

MTG. HARDWARE for PAC TRAC

 P/N 2046 #10-24 x 1 S.S.
S.S. Pan Head Screw

QTY

4

 P/N 7016 Trac Lok Insert

4

STANDARD MTG. HARDWARE

 P/N 2098 1/4-20 x 3/4 S.S.
S.S. Pan Head Screw

QTY

4

 P/N 2069LN 1/4-20
Nylon Locking Nut

4

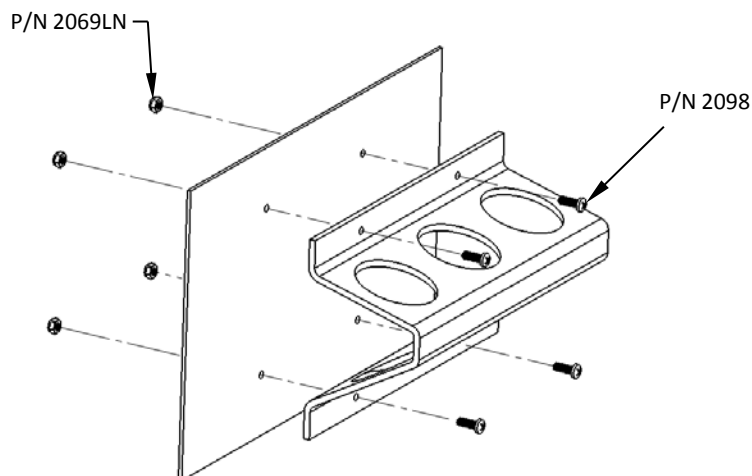


FIGURE 1

(Thru Mounting Method)

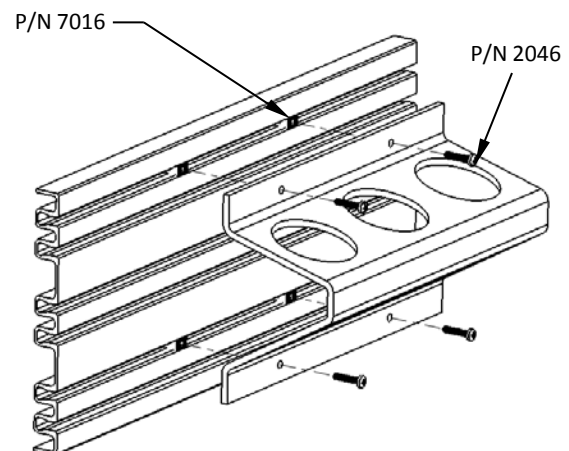


FIGURE 2

(PAC TRAC Mounting)